
ECO-SEAL™ SERIES 4300 ED

Dimensions

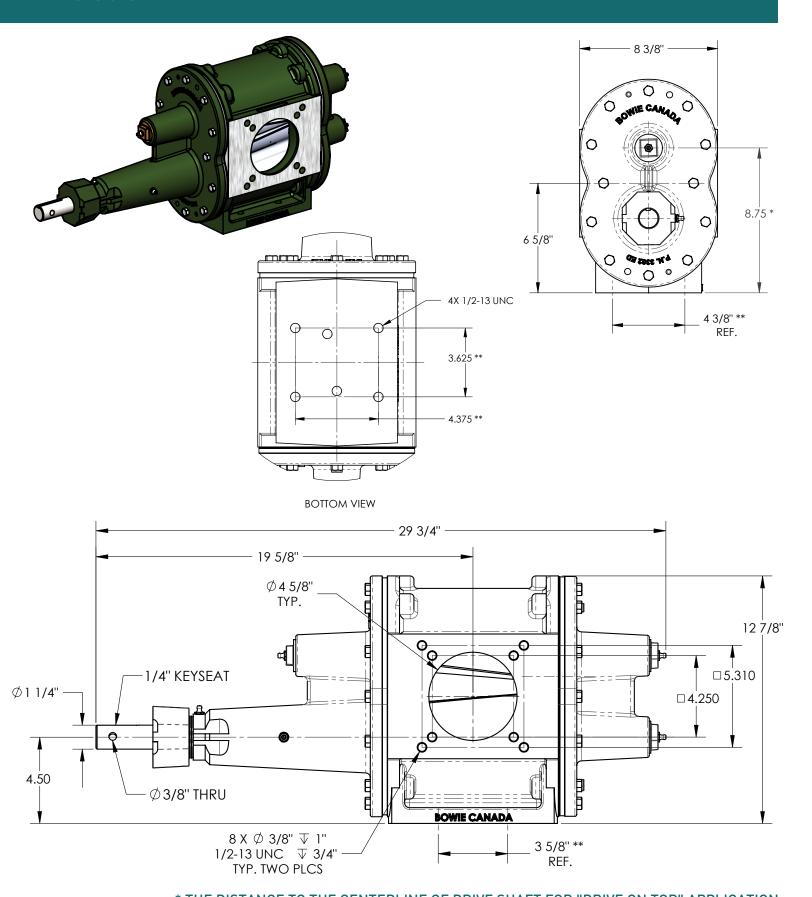

- * THE DISTANCE TO THE CENTERLINE OF DRIVE SHAFT FOR "DRIVE ON TOP" APPLICATION; "DRIVE ON TOP" APPLICATION IS OPTIONAL;
- ** BASE BOLT PATTERN 4 x 1/2-13UNC;

"LEFT" & "RIGHT" configurations are shown; 4 3/16" - 3" - 1 1/2" Dimensions are symmetrical; Õ 0 Õ 12 3/8" 8 3/16" 3 11/16" — 7 3/16" — - 29 11/16" — – 19 5/8" — -1/4 Keyway 12 3/8" Ö 3 11/16" Ø3/8" THRU □4 1/4" --8 x1/2-13UNC Typ. Two Ports — □5 5/16"*-*- Ø1 1/4" 12 3/16" ٥ 2 9/16" \circ **4**4 - 5 1/2" -4 x1/2-13UNC